
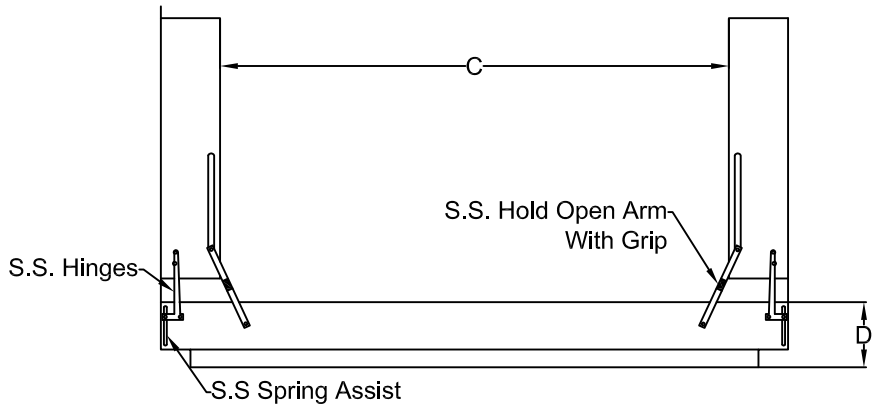


Model	24" X 48"	30" X 48"	30" X 60"	36" X 48"	36" X 60"	36" X 72"	48" X 48"	48" X 72"	60" X 60"	60" X 72"	Custom
A	24"	30"	30"	36"	36"	36"	48"	48"	60"	60"	_____"
B	48"	48"	60"	48"	60"	72"	48"	72"	60"	72"	_____"
C	43"	41"	51"	39"	51"	63"	35"	59"	45"	57"	_____"
D	5.5"	6.5"	6.5"	6.5"	6.5"	6.5"	8.5"	8.5"	9.5"	9.5"	_____"

Hatch Size Varies Based on Field Conditions.

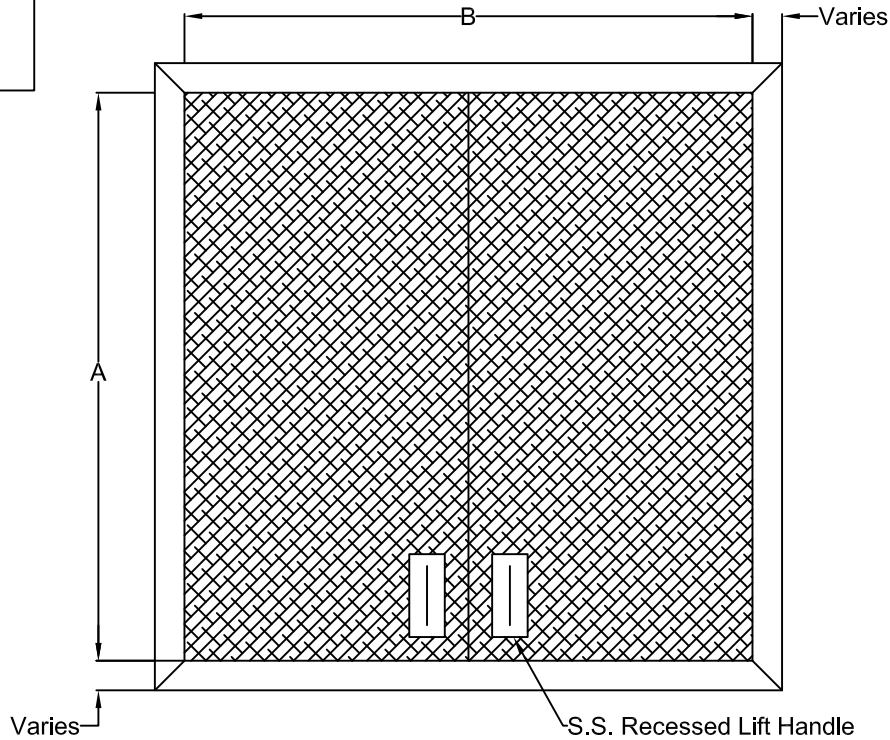

SPECIFICATIONS:

ACCESS DOOR SHALL BE A NON-WATERTIGHT DOOR.
 DOOR LID SHALL BE FABRICATED WITH 1/4" ALUMINIUM DIAMOND PLATE.
 FRAME SHALL BE EXTRUDED ALUMINIUM W/ A 3/16" NEOPRENE GASKET.
 HINGES SHALL BE ALL STAINLESS STEEL.
 ALL HARDWARE SHALL BE 316 STAINLESS STEEL.
 SUITABLE FOR H20 LOAD DESIGN.



**Continental
Concrete
Products, Inc.**
 1 South Grosstown Rd.
 Pottstown, PA 19464
 Phone: (610) 327-3700
 Fax: (610) 327-9488

**H-20 LOAD DESIGN DOUBLE-LEAF
ALUMINIUM ACCESS HATCH**

SIGNATURE OF APPROVAL

DATE

AR

DWG

STRUCTURE

2/08/16

DLH