
PSX Boot Gasket to be used for 12" - 36" Dia. Sanitary Sewer Pipe.



SPECIFICATIONS:

PSX Boot Gaskets provide a durable & flexible pipe—to—manhole connection. PSX Boot Gaskets are widely specified & accepted with exceptional watertight performance and meet or exceed the requirements of ASTM C923. The rubber gasket element shall have a minimum tensile stength of 1600 PSI and the minimum cross—section thickness shall be 0.275 inches (7mm). The internal expansion ring and external compression clamp(s) shall be constructed of Series 300 non—magnetic stainless steel and shall utilize no welds in their construction.

The finished connection shall provide sealing to a minimum of 13 PSI and shall accommodate pipe deflection to a minimum of 7 degrees without loss of seal.

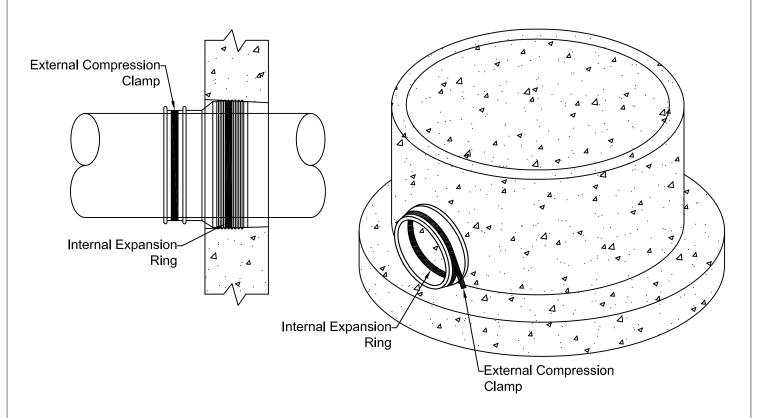

PRESS-SEAL CORP. PSX BOOT GASKET (USED FOR LARGER SANITARY SEWER PIPE)

.	SIGNATURE OF APPROVAL	DATE	AR DV	WG		STRUCTURE	
)	SIGNATURE OF AFTROVAL	DAIL		WG		BIROCIORE	
.				_			
i		1 2/00/	16	L	$\mathcal{C} \vee \mathcal{U} \cap \mathcal{C}$		
		1 2/00/	ו סו		$\Box \land \Box \lor \Box$		