



(4) CHANNEL BOLT POCKETS
CAST INTO TOP OF CONE

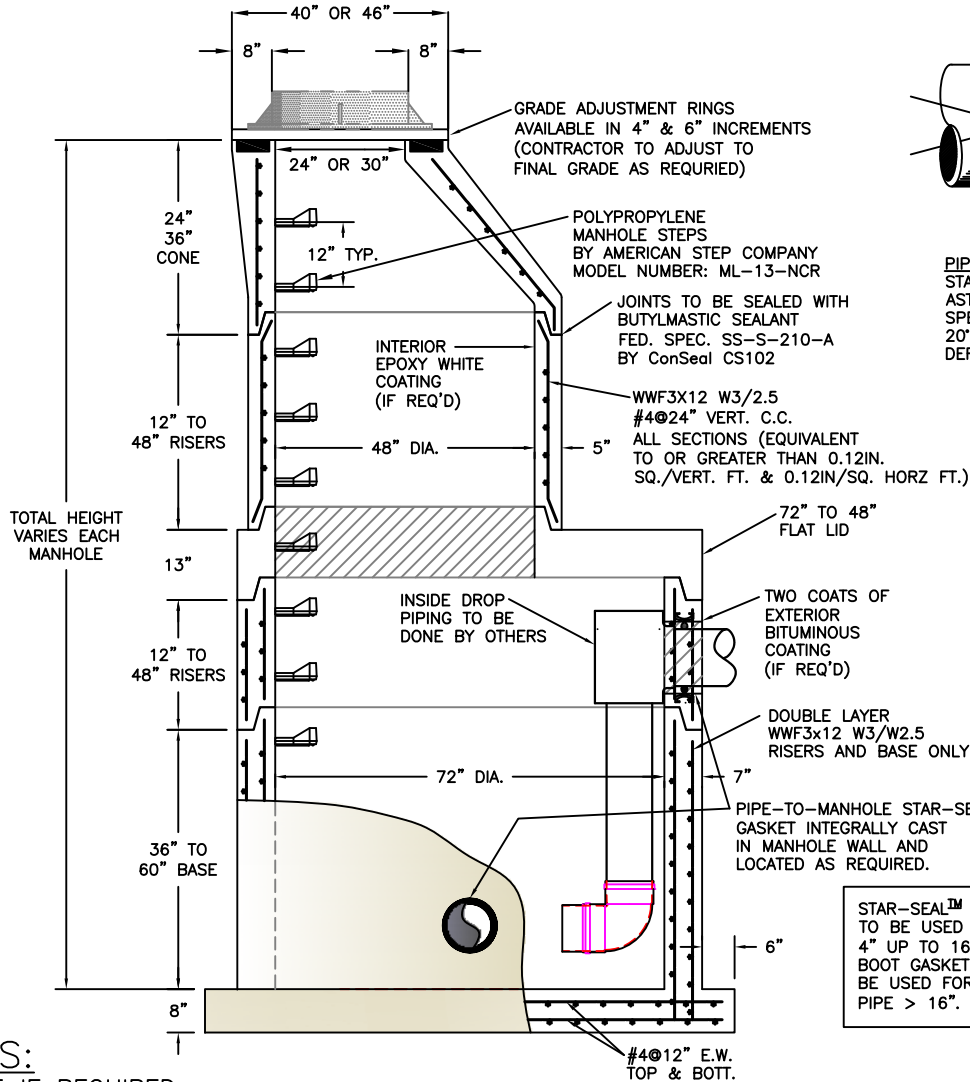

PIPE TO MANHOLE SEAL
STAR-SEAL™ GASKET PER
ASTM RUBBER GASKET
SPECS C923, JOINT ALLOWS
20° OMNIDIRECTIONAL
DEFLECTION

STAR-SEAL™ GASKET
TO BE USED FOR
4" UP TO 16" PIPE.
BOOT GASKET TO
BE USED FOR
PIPE > 16".

SPECIFICATIONS:

- PVC LINING AVAILABLE IF REQUIRED.
- MEETS PENNDOT PUBLICATION 408.
- MINIMUM CONCRETE STRENGTH 4000 PSI @ 28 DAYS
- STEEL REINFORCEMENT ASTM A185 HORIZONTAL & VERTICAL STEEL
- 1 1/2" MIN. CONCRETE COVER (ALL REINFORCEMENT)
- MANHOLE DESIGN SPEC. CONFORM TO "PRECAST REINFORCEMENT MANHOLE SECTIONS" ASTM C478, LATEST REVISION.

**Continental
Concrete
Products, Inc.**
1 South Grosstown Rd.
Pottstown, PA 19464
Phone: (610) 327-3700
Fax: (610) 327-9488

<h2 style="margin: 0;">72" DIA. SANITARY SEWER INSIDE DROP MANHOLE w/STAR-SEAL™ PIPE TO MANHOLE GASKET</h2>			
SIGNATURE OF APPROVAL	DATE	AR	DWG
	2/08/16		72IDSMH
STRUCTURE			