


8QRS Boot Gasket to be used for 1 1/2" - 4" Dia. Pipe.

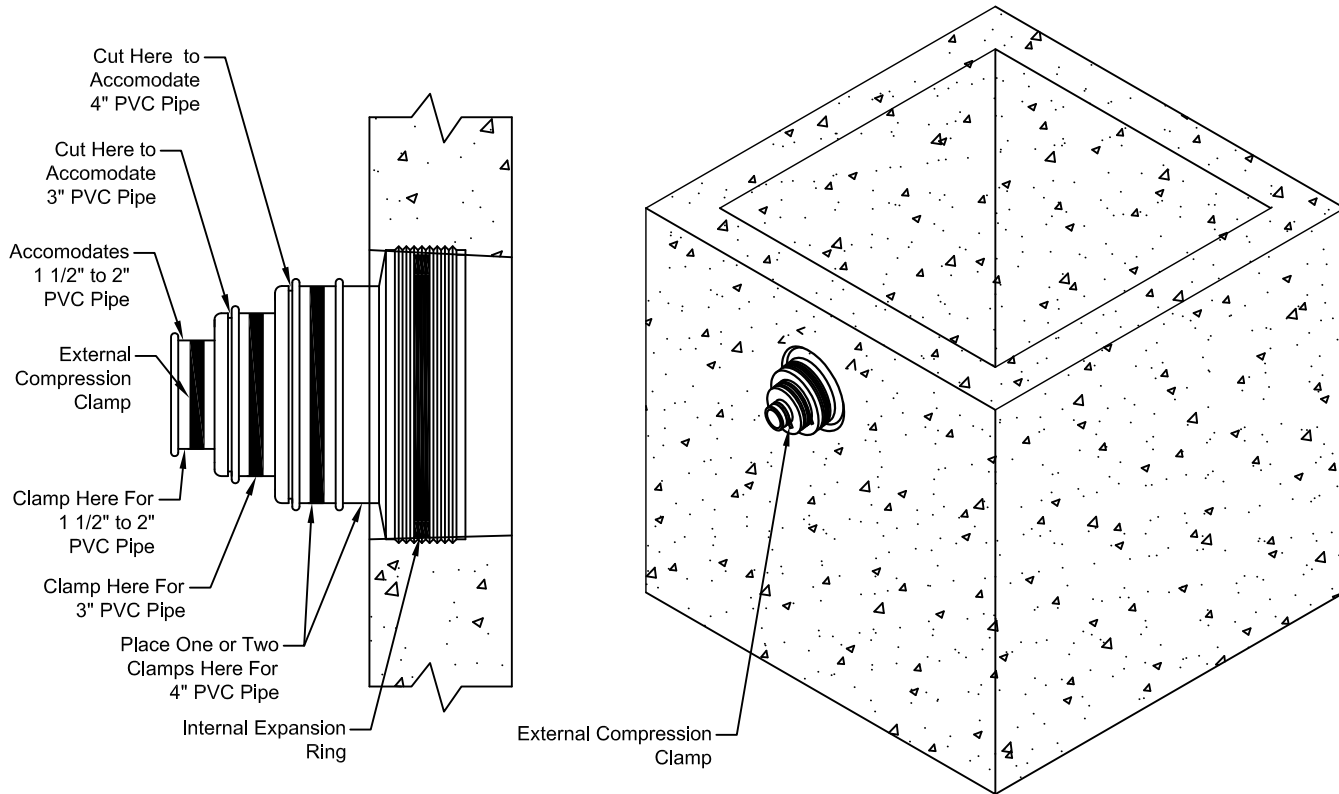

SPECIFICATIONS:

PSX Boot Gaskets provide a durable & flexible pipe-to-manhole connection. PSX Boot Gaskets are widely specified & accepted with exceptional watertight performance and meet or exceed the requirements of ASTM C923. The rubber gasket element shall have a minimum tensile strength of 1600 PSI and the minimum cross-section thickness shall be 0.275 inches (7mm). The internal expansion ring and external compression clamp(s) shall be constructed of Series 300 non-magnetic stainless steel and shall utilize no welds in their construction. The finished connection shall provide sealing to a minimum of 13 PSI and shall accommodate pipe deflection to a minimum of 7 degrees without loss of seal.

*AS MANUFACTURED BY PRESS-SEAL GASKET CORPORATION

**Continental
Concrete
Products, Inc.**
1 South Grosstown Rd.
Pottstown, PA 19464
Phone: (610) 327-3700
Fax: (610) 327-9488

PRESS-SEAL 8QRS BOOT GASKET

<u>SIGNATURE OF APPROVAL</u>	<u>DATE</u>	<u>AR</u>	<u>DWG</u>	<u>STRUCTURE</u>
	2/08/16		8QRSBG	